

# *Panther 200H*

## **200 Series HVLP Corrosion Control**

*The Panther 200H is a high quality general purpose pressure feed sprayer designed for corrosion control applications. Comes with an all stainless steel fluid passage, perfect for zinc rich, glues, CARC or any coating that makes clean up difficult.*

## *Panther 200H*

### **Features**

- ➔ **Forged Aluminum Body**
- ➔ **Stainless Steel Fluid Passages**
- ➔ **Designed For Corrosion Control**
- ➔ **Teflon Hard Coat Air Caps Available**
- ➔ **Complies With All HVLP Regulations**



## *Panther 200H*

***"Preventing Corrosive Agents"***

### **Available Outfits**

#### **2 Quart Outfits**

*(Includes 5' Hose Assemblies)*



**2 Quart  
(Economy)**

**OP200H-130**



**2 Quart  
(Bandit)**


**OP200H-600**

#### **Tank Outfits**

*Tank Outfits Include 25' Hose Assemblies and are available in 2.5 gal, 5 gal, 10 gal, 12.5 gal and 15 gal sizes.*

*(Includes 25' Hose Assemblies)*



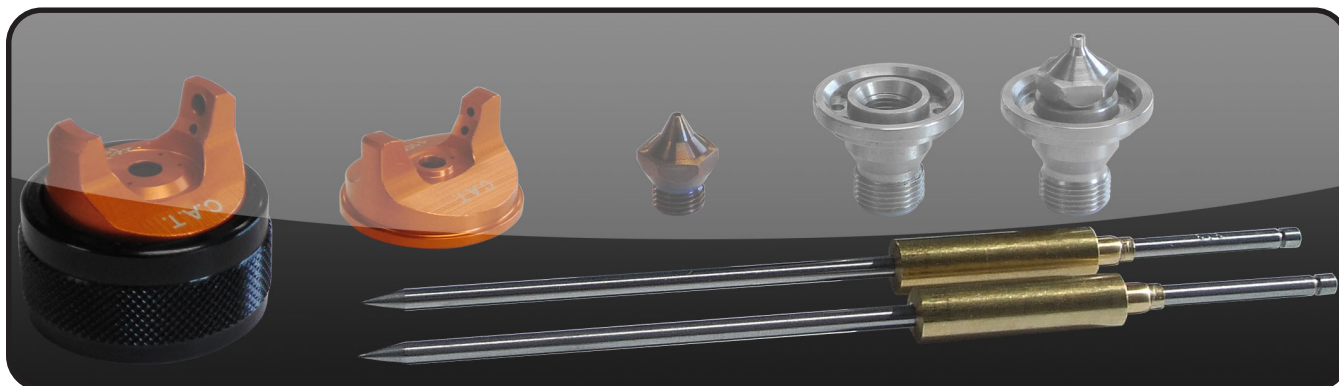

### Nozzle Chart for *Panther 200H*

Material Type	Fluid Orifice x Air Cap	Maximum Pattern Width	Pressure / Siphon
<b>Very Thin</b> less than 16 sec. Zahn #2 inks, dyes, solvents, stains	1.1 mm x 1028 1.1 mm x 1033	11 9	P P
<b>Thin</b> 16 to 20 sec. Zahn #2 lacqers, enamels, primers, sealers	1.1, 1.4 mm x 1057 1.1, 1.4 mm x 1100	11 12	P/S P/S
<b>Medium</b> 21 to 30 sec. Zahn #2 automotive base coat enamels, primers, epoxies, urethanes, automotive clear coat	1.4 mm x 1057 1.4 mm x 1100 1.4 mm x 1046 1.4 mm x 1083	11 12 11 13	P/S P/S P P
<b>Heavy</b> over 30 sec. Zahn #2 heavy body primers, high solid enamels, high solid automotive coatings, adhesives	1.8, 2.2 mm x 1046 1.8, 2.2 mm x 1083	11 13	P P

### Air Caps for *Panther 200H*

Air Caps	Retaining Rings	Max Inlet Pressure	CFM @ Max Inlet Pressure
22-1028	21-1001	29 PSI	18 CFM @ 29 PSI
22-1033		38 PSI	18.75 CFM @ 38 PSI
22-1057		50 PSI	22 CFM @ 50 PSI
22-1100		37 PSI	18 CFM @ 37 PSI
22-1100 X 2.2S		37 PSI	18 CFM @ 37 PSI
22-1046**		47 PSI	22.5 CFM @ 47 PSI
22-1083**		55 PSI	26 CFM @ 55 PSI

\*Note: Air cap test gages are available to confirm HVLP compliance.

\*\*Must be used with 32-02XX fluid nozzle tips