



TOMCAT

100 Series Conventional General Purpose

The Tomcat is a price competitive and high quality production sprayer. It is designed for the painter who wants a conventional gun for spraying a wide range of coatings from glue to fine finish... The Tomcat can handle it all.

TOMCAT

Features

- Economically priced
- General purpose spray gun with a wide range of fluid nozzles and air caps
- Standard pressure setup (1.2 x 2263)
- Standard siphon setup (1.8 x 2266)



1 Quart **Pressure Cup** (Aluminum) OT100C-303R2

Available Outfits




1 Quart Siphon Cup (Aluminum) OT100C-301

Quality Simplicity Reliability







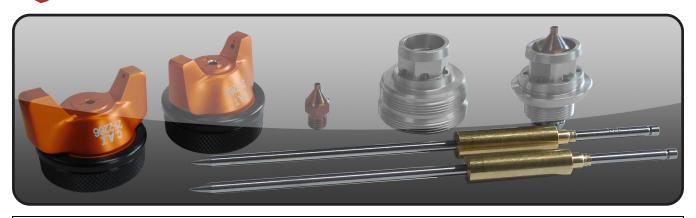

Nozzle Chart for TOMCAT				
Material Type	Fluid Orifice x Air Cap	Maximum Pattern Width	Pressure / Siphon	
Very Thin	0.6, 0.7 mm x 2163	8	Р	
less than 16 sec. Zahn #2	0.6, 0.7 mm x 2166	9	S	
inks, dyes, solvents, stains	0.6, 0.7 mm x 2266	12	S	
Thin 16 to 20 sec. Zahn #2	0.6, 0.7, 1.0 mm x 2163	8	Р	
	0.6, 0.7, 1.0 mm x 2366	14	S	
lacqers, enamels, primers, sealers	0.6, 0.7, 1.0 mm x 2466	13	S	
Medium				
21 to 30 sec. Zahn #2	1.2, 1.3, 1.5, 1.8 mm x 2263	14	Р	
automotive base coat	1.2, 1.3, 1.5, 1.8 mm x 2266	10	S	
enamels, primers, epoxies,	1.2, 1.3, 1.5, 1.8 mm x 2266-3	15	S	
urethanes, automotive	1.2, 1.3, 1.5, 1.8 mm x 2466	13	S	
clear coat				
Heavy			_	
over 30 sec. Zahn #2	1.5, 1.8 mm x 2466	13	S	
heavy body primers, high	2.2 mm x 2167	12	P _	
solid enamels, high solid	2.2 mm x 2267	15	P _	
automotive coatings, adhesives	2.8 mm x 2168	12	Р	

Common Air Caps for TOMCAT				
Air Caps	Pressure / Siphon	Max Inlet Pressure	CFM @ Max Inlet Pressure	
21-2263	Pressure	50 PSI	14 CFM @ 50 PSI	
21-2166	Siphon	50 PSI	5 CFM @ 50 PSI	
21-2266	Siphon	50 PSI	12 CFM @ 50 PSI	
21-2266-3	Pressure	50 PSI	16.2 CFM @ 50 PSI	
21-2366	Siphon	50 PSI	12 CFM @ 50 PSI	
21-2466	Siphon	50 PSI	15 CFM @ 50 PSI	
21-2167	Pressure	50 PSI	14.5 CFM @ 50 PSI	
21-2267	Pressure	50 PSI	15 CFM @ 50 PSI	
21-2168	Pressure	50 PSI	14 CFM @ 50 PSI	